


3-in-1 COMBINATION TEST MACHINE

Technology
[made in Germany]

Automatic combined final air leakage test, final electrical load test and needle marking of automotive car and truck batteries with best and high technology

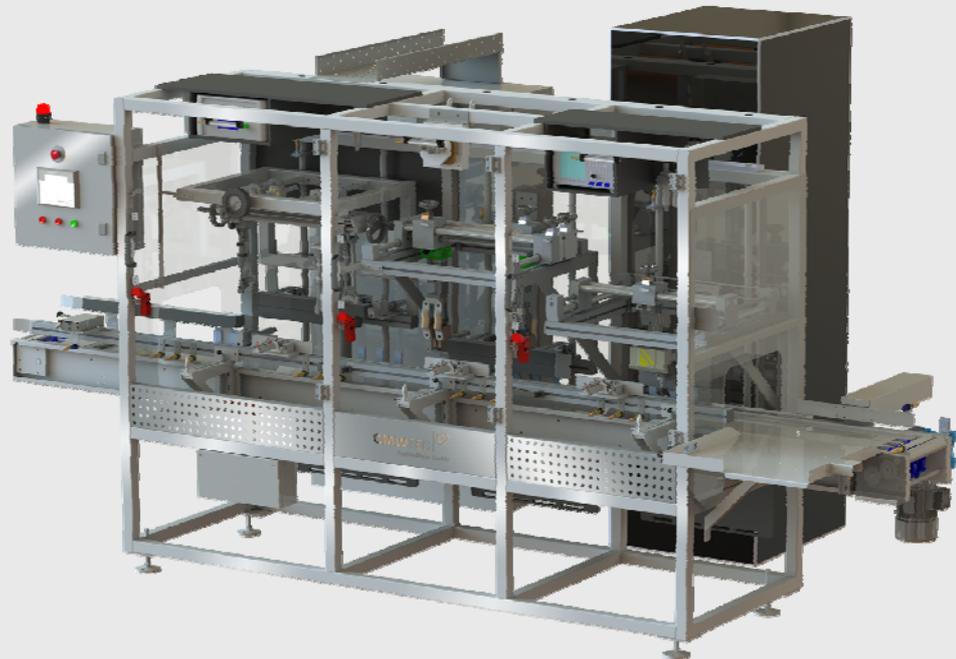

■ 1 UN AIR LEAKAGE TEST ■ 1 UN HRD TEST ■ 1 UN NEEDLE MARKING

The Advantage:

- Three side test stroke, for all sealed cover types
- Post contact by clamping system
- OCV,CCV; deltaV Test (test device at disposal of customer)
- Interface to read out test data
- Pre-selection of numbers or letters or combinatio
- Marking on plastic box or lead post
- Reject table for failed batteries
- Automatic test process
- Combination or single use of each function unit
- One Touch Panel for all single machines
- 2D Scanner for collecting Battery code Data
- High Capacity output
- Quick and easy change-over time

Basic machine

The basic machine accommodates the individual components and contains the pneumatic and Some electric control system of the machine. The Main Electrical cabinet is remote standing behind the machine. The basic structure accommodates the operating console which is vertically adjustable. The latter serves to accommodate the individual stations, the different heights of the batteries are adjusted via the vertical spindle movement.

Air Leak Test unit (DPA)

The test unit accommodates the three different test probes with a corresponding test adapter. For testing, the probe is moved onto the charging hole of the battery and while testing a hermetic sealing between cell and test adapter is guaranteed.

Test unit (HRD)

The test unit accommodates the probe with a corresponding test clamp. For testing, the probe is moved onto the terminals of the battery and while testing a hermetic sealing between terminal and test clamp is guaranteed.

Test clamps (HRD)

The test clamps with the form of the terminals are opened and closed by a pneumatic grab and enclosed the terminal in test position, so that a superb and smooth connecting is guaranteed.

Needle Marking Function unit (BMA)

A date code is applied to all batteries prior to leaving the machine. The date code is changed manually by a machine operator. The date code is to be applied by a pin printer. The date code printer is located on a moveable coordinate system to set-up it to the position of top of the battery cover. The coordinates are stored in a library data base for each battery type.

Battery positioning unit

For testing, the batteries are exactly positioned under the working station. This performed by a system, which always guarantees an exact centre-positioning and does not require any change of positioning in machine direction.

Lateral guide unit

The lateral guide including the battery separation and the exit monitoring device is designed for laterally adjusting the battery below the working station. A clamping mechanism ensures the adjustment to be executed exactly and fast.

Battery conveyor unit

A flat top chain transports the batteries through the machine and, at the same time, ensures them to be adjusted smoothly and exactly at the work position.

Reject unit

Following the Air Leak and HRD Test unit the machine is equipped with an eject unit. If there is a failure, the battery will be rejected at the end of the machine on a table. Failure will be shown on the Touch Panel of the machine

Description of individual 3-in-1 function

The machine is designed to have 3 different functions units in one main frame with one PLC controller and one HMI. The individual batteries supplied through the conveyor of the test machine are positioned exactly at each function station. Second cover air leak testing followed by High Rate Discharge testing followed by a Needle Marking function for serial no. or 2D codes. The machine is equipped with a reject table for eject batteries which have not passed the Air leak or HRD test.

Technical specifications

Battery type	:	automotive 12V car and truck batteries.
Capacity	:	up to 8 batteries/min (depending on test time)
Weight of batteries	:	20 – 70 kg
Dimension of machine	:	L = 4200 mm W = 1525 mm H = 2200 mm
Construction	:	Stainless steel 1.4301 (304), with aluminum profiles
Electric	:	230/400V, 3-Phase, 50/60 Hz, 4 Wire
Control voltage	:	24 DC
Power consumption	:	7,0 kW
Operating pressure	:	6 bar (90 psi)

CMWTEC technologie GmbH