


# ECO WASHING MACHINE

Technology  
[made in Germany]

Cleaning of automotive car and truck batteries  
with sophisticated technology

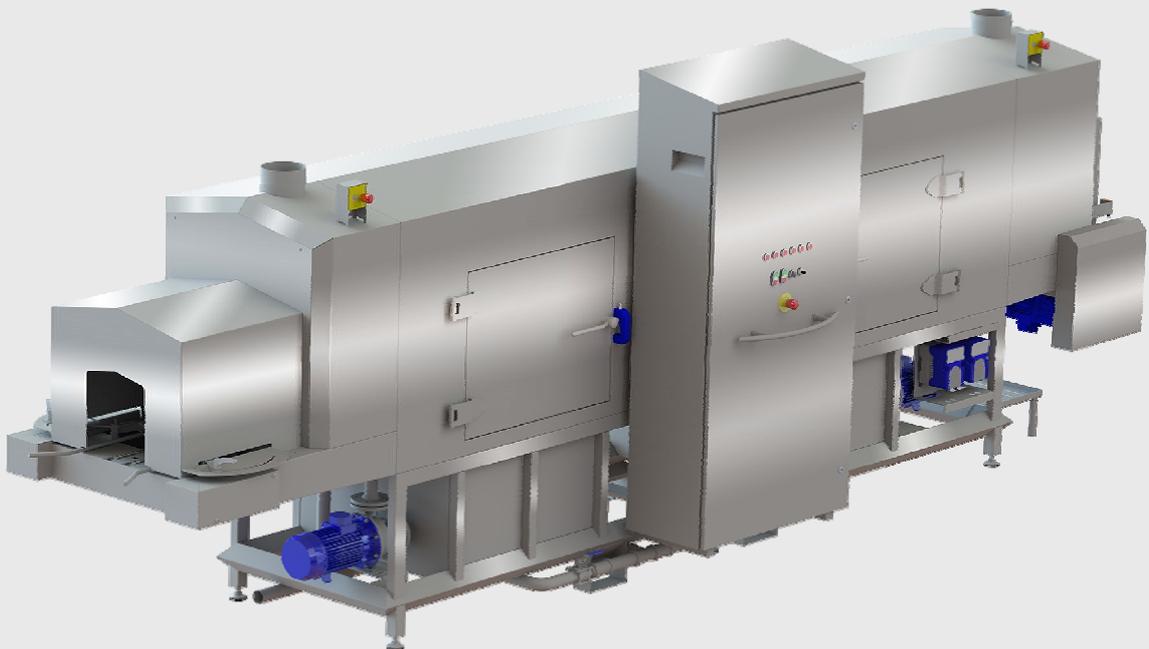

## The Advantage:

- Full stainless steel construction (316Ti)
- One-piece manufactured and sealed, low energy consumption
- Nozzle arm disassembling without tooling for easy cleaning
- Special open Conveyor grid for washing of battery bottom
- Stainless steel electric tank heating elements and temperature control
- Special spiral heating made of heat resistant inox prevent burn-through
- Wash water cascade flow system
- Double-walled heat and noise insulation
- Central drain pipework

**Basic machine**

The base unit is a one-piece steel structure and serves as a support for all other assembly groups.

**Battery input unit**

Input of batteries onto the special conveyor belt of the washing/drying machine.

**Pre-wash zone**

Distribution of the wash water onto the total surface of the battery Included dead corners and angles. The wash systems consist of individual wash arms with mounted swivelling jet nozzles for easy handling.

**Spray wash zone**

2<sup>nd</sup> Distribution of the wash water onto the total surface of the battery Included with 3 heating systems for the water tank. The wash systems consist of individual wash arms with mounted swivelling jet nozzles for easy handling. For best wash result a detergent must be added. Therefore, the machine is equipped with a detergent dosing pump, monitored by a pH-control system.

**Final rinse zone**

Fresh water heated by a separate boiler at the final rinse sprayed by flat jet nozzles from all sides through the battery. A wetting agent is injected to improve drying properties.

**Battery output**

Output of the batteries to the finishing line.

**Description of function**

The task is optimal cleaning of automotive batteries of sulphuric acid. The transport through the individual wash zones is effected straight on a continuous special stainless-steel roller chain for a safe transport of the batteries and therefore a long service life. A lateral guide will keep the batteries in line and is one side adjustable for different battery width.

**Technical specifications**

Battery type	:	automotive car and truck batteries
Capacity	:	up to 8 batteries/min depending on conveyor speed
Weight of batteries	:	20 – 70 kg
Dimension of machine	:	L = 5500 mm W = 1450 mm H = 2050 mm
Construction	:	Full acid proof Material, Stainless steel 1.4571 (316Ti) Plastic PP and PVC Pieces not acid resistant with special protection
Electric	:	230V, 3-Phase, 50/60 Hz
Control voltage	:	24V DC
Power consumption	:	62,0 kW, 200A